

DrägerSensor® XXS NH₃

Order no. 68 10 888

Used in	Plug & Play	Replaceable	Guaranty	Expected sensor life	Selective filter
Dräger Pac 7000	no	yes	1 year	> 2 years	no
Dräger Pac 8000	no	yes	1 year	> 2 years	no
Dräger X-am 5000	no	yes	1 year	> 2 years	no
Dräger X-am 5600	no	yes	1 year	> 2 years	no
Dräger X-am 8000	no	yes	1 year	> 2 years	no

MARKET SEGMENTS

Food and beverage, poultry farming, power generation, inorganic chemicals, fertilizer production, hazmat, fumigation, metal processing, petrochemical, pulp and paper.

TECHNICAL SPECIFICATIONS


Detection limit:	4 ppm
Resolution:	1 ppm
Measurement range:	0–300 ppm NH ₃ (ammonia)
Response time:	≤ 10 seconds (T ₅₀)
Measurement accuracy	
Sensitivity:	≤ ± 3% of measured value
Long-term drift, at 20°C (68°F)	
Zero point:	≤ ± 5 ppm/year
Sensitivity:	≤ ± 2% of measured value/month
Warm-up time:	≤ 12 hours
Ambient conditions	
Temperature*:	(–40 to 50)°C (–40 to 122)°F
Humidity*:	(10 to 90)% RH
Pressure:	(700 to 1,300) hPa
Influence of temperature	
Zero point:	≤ ± 5 ppm
Sensitivity:	≤ ± 5% of measured value
Influence of humidity	
Zero point:	≤ ± 0.1 ppm/% RH
Sensitivity:	≤ ± 0.2% of measured value/% RH
Test gas:	approx. 10 to 75 ppm NH ₃

*Sudden temperature or humidity changes lead to dynamic effects (fluctuations).
These dynamic effects decrease within 2 to 3 minutes.


SPECIAL CHARACTERISTICS

A fast response time and excellent repeatability are just two examples of this sensor's special characteristics.

Sensor reaction to NH₃ at 20 °C/68 °F
Flow = 0.5 l/min, 50 ppm NH₃

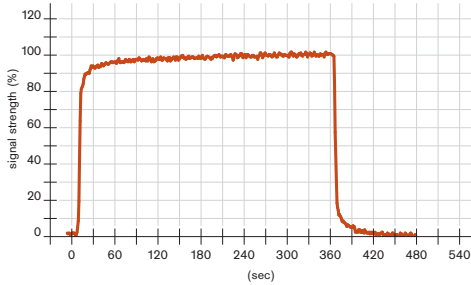

Repeatability of NH₃ Sensor with 50 ppm NH₃,
average from five sensors

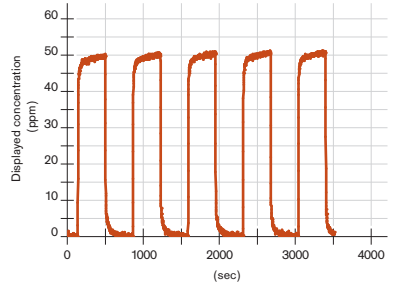

The values shown in the following table are standard and apply to new sensors. The values may fluctuate by $\pm 30\%$. The sensor may also be sensitive to additional gases (for more information, please contact Dräger). Gas mixtures may be displayed as the sum of all components. Gases with a negative cross sensitivity may displace an existing concentration of NH₃. To be sure, please check if gas mixtures are present.

RELEVANT CROSS-SENSITIVITIES

Gas/vapor	Chem. symbol	Concentration	Display in ppm NH ₃
Acetylene	C ₂ H ₂	100 ppm	No effect
Carbon dioxide	CO ₂	10 Vol.-%	No effect
Carbon monoxide	CO	1,000 ppm	No effect
Chlorine	Cl ₂	10 ppm	≤ 30 (-)
Ethanol	C ₂ H ₅ OH	250 ppm	≤ 40
Hydrogen	H ₂	1,000 ppm	≤ 4
Hydrogen chloride	HCl	20 ppm	≤ 15 (-)
Hydrogen sulfide	H ₂ S	20 ppm	≤ 70
Isobutylene	(CH ₃) ₂ CCH ₂	100 ppm	No effect
Methane	CH ₄	0.9 Vol.-%	No effect
Nitrogen dioxide	NO ₂	20 ppm	≤ 10 (-)
Nitrogen monoxide	NO	20 ppm	≤ 10
Ozone	O ₃	0.5 ppm	No effect
Phosphine	PH ₃	1 ppm	≤ 2
Sulfur dioxide	SO ₂	20 ppm	No effect

(-) Indicates negative deviation