



**GUARDIAN**[®]



Northside Sales, Co.
Safety & Industrial Products
800-467-9005

CR5

Personal
Self-Retracting Lifeline

The CR5 Personal SRL is part of Guardian's strongest lineup of SRLs in the industry. This lightweight Class 1 personal SRL can be used in a combination of either fall arrest or travel restraint applications.


**HEIGHT SAFETY.
SIMPLIFIED.**

guardianfall.com



CR5

Personal Self-Retracting Lifeline

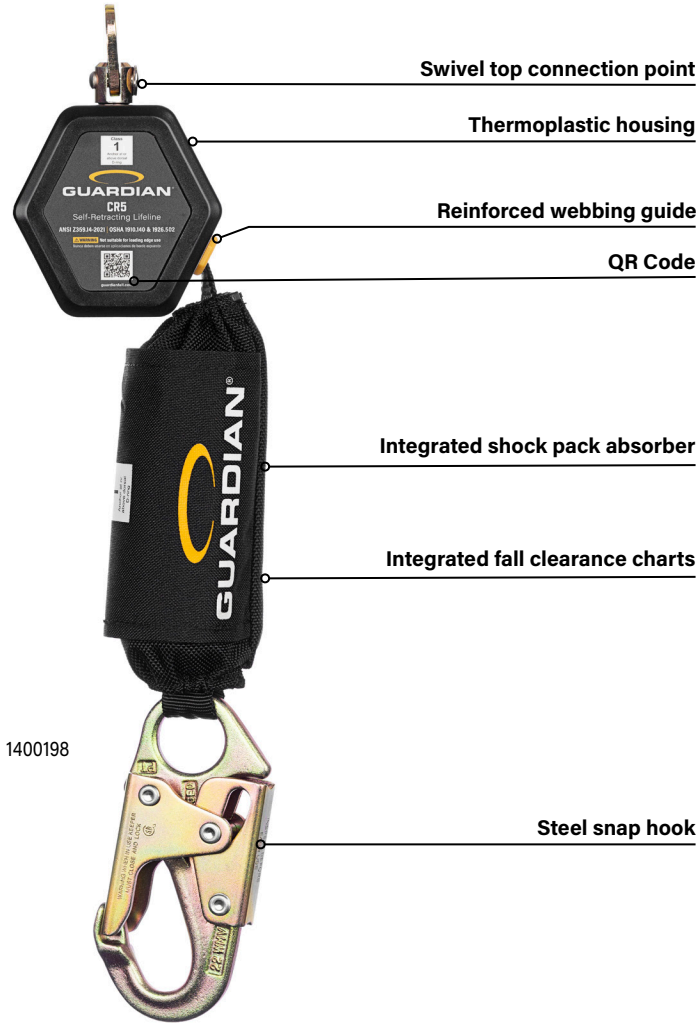

Key features & benefits

Swivel top connection point

Swivels 360 degrees to ensure the device remains in the best orientation during use and also helps prevent lifeline snagging or tangling

Impact modified thermoplastic housing

Super lightweight & durable for long-lasting use in the toughest applications

Digitally enabled labels

QR code for quick and easy access to up-to-date safety and product information

Guardian shock pack cover

Helps increase product longevity and protect safety labeling

Integrated fall clearance charts

Fall clearance charts integrated into shock pack cover for easy access to clearance charts anytime, anywhere

Reinforced webbing guide

Added strength and reduces webbing friction

Multiple hook options available

Choose steel or aluminum snap or rebar hooks, depending on job requirements and anchorage type

Specifications

Class 1 SRL (ANSI Z359.14-2021)

Length | 6 ft

Average Arrest Force | 1,150 lb

Maximum Arrest Force | 1,350 lb

Maximum Arrest Distance | 3' (100-420 lb)

Type | SRL-P

Materials | Polyester, Impact Modified Thermoplastic resin, HMPE Webbing, Steel, Aluminum

Hook Options



Steel snap hook



Steel rebar hook



Aluminum snap hook



Aluminum rebar hook

Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI Z359.7.

This product is compliant with the following safety regulations:
ANSI Z359.14-2021 | OSHA 1910.140 & 1926.502

For more information:

+1 (800) 466 6385

info@guardianfall.com



Designed and tested in the **United States**

CR5

Personal Self-Retracting Lifeline



| Part number (s) | Description | Hook type | Length | OSHA User Weight Range | ANSI User Weight Range |
|-----------------|----------------------|---------------------|--------|------------------------|------------------------|
| 1400198 | CR5 web SRL-P | Steel snap hook | 6' | 100-420 lb | 130-310 lb |
| 1400199 | CR5 web SRL-P | Steel rebar hook | 6' | 100-420 lb | 130-310 lb |
| 1400200 | CR5 web SRL-P | Steel tie-back hook | 6' | 100-420 lb | 130-310 lb |
| 1400201 | CR5 web SRL-P | Aluminum snap hook | 6' | 100-420 lb | 130-310 lb |
| 1400202 | CR5 web SRL-P | Aluminum rebar hook | 6' | 100-420 lb | 130-310 lb |
| 1400203 | CR5 double web SRL-P | Steel snap hook | 6' | 100-420 lb | 130-310 lb |
| 1400204 | CR5 double web SRL-P | Steel rebar hook | 6' | 100-420 lb | 130-310 lb |
| 1400205 | CR5 double web SRL-P | Steel tie-back hook | 6' | 100-420 lb | 130-310 lb |
| 1400206 | CR5 double web SRL-P | Aluminum snap hook | 6' | 100-420 lb | 130-310 lb |
| 1400207 | CR5 double web SRL-P | Aluminum rebar hook | 6' | 100-420 lb | 130-310 lb |

Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by ANSI Z359.7.

This product is compliant with the following safety regulations:
ANSI Z359.14-2021 | OSHA 1910.140 & 1926.502

For more information:

+1 (800) 466 6385

info@guardianfall.com



Designed and
tested in the
United States