

**GUARDIAN**<sup>®</sup>



*Northside Sales, Co.*

Safety & Industrial Products

800-467-9005

## CR3-EDGE

Personal Self-Retracting  
Lifeline

The new CR3-Edge Personal SRL can be used for numerous applications across the jobsite where the connecting device has potential to impact the edge of the hazard in the event of a fall. This robust Class 2 SRL offers a durable and compact design to keep workers safe in the most extreme conditions.

Class

**2**

Anchor above  
or below dorsal  
D-ring

**HEIGHT SAFETY.  
SIMPLIFIED.**

[guardianfall.com](http://guardianfall.com)




# CR3-EDGE

Personal Self-Retracting Lifeline



**Class**  
**2**  
Anchor above  
or below dorsal  
D-ring

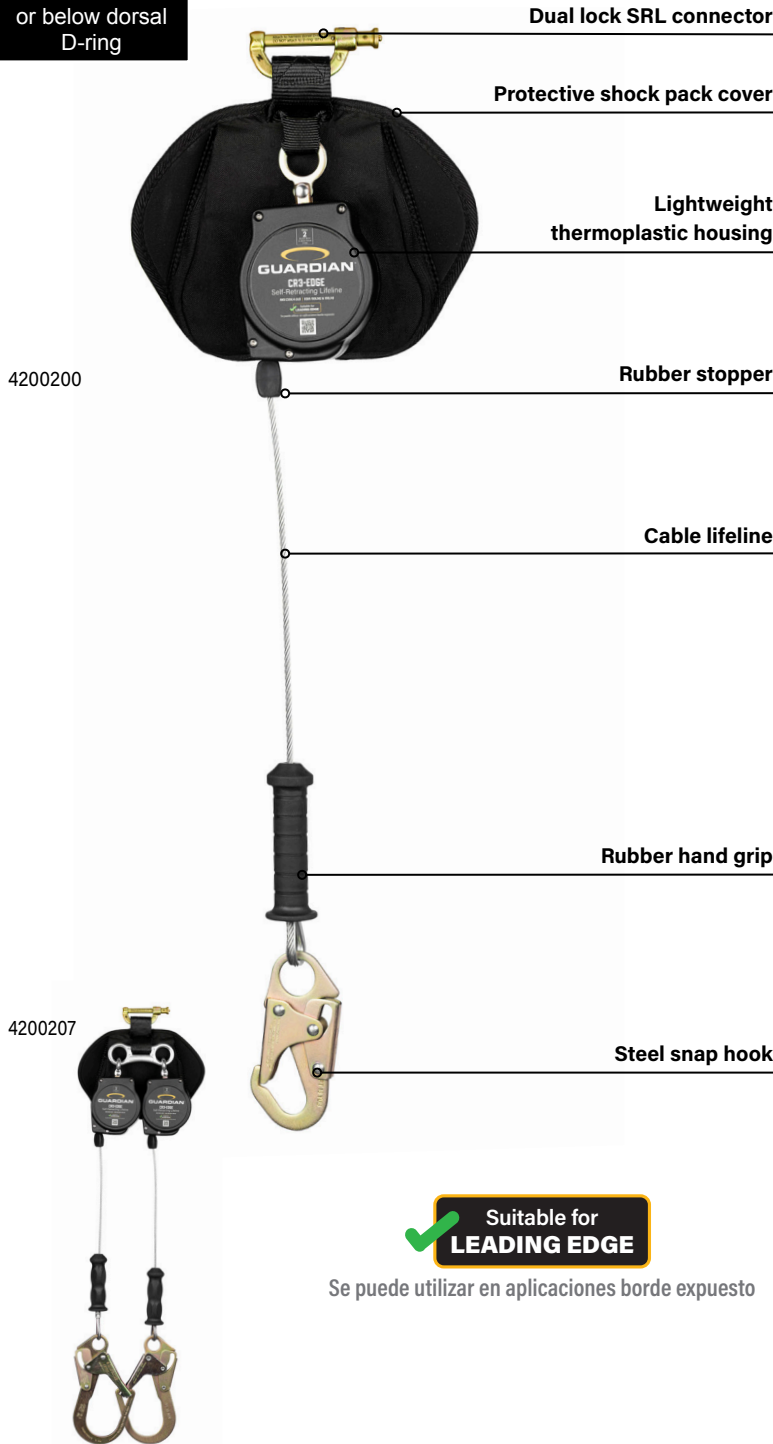

Suitable for **LEADING EDGE**

Se puede utilizar en aplicaciones borde expuesto

## Key features & benefits

### Dual lock SRL connector

Provides quick and easy installation onto most full body harnesses

### Protective shock pack cover

Acts as cushion between the housing and worker to increase comfort

### Lightweight thermoplastic housing

Durable construction for long-lasting use in the toughest conditions

### Rubber stopper

Ensures enough lifeline is accessible at all times

### Cable lifeline

Resists cuts and abrasions

### Rubber hand grip

Ergonomic handle for increased comfort

### Multiple hook options available

Choose steel or aluminum snap or rebar hooks, depending on job requirements and anchorage type

## Specifications

**User weight range (including tools and equipment)** | ANSI 130-310 lb | OSHA 100-310 lb (LE) | OSHA 100-420 LB (NON-LE)

**Max. Arresting Force** | 1,350 lb

**Ave. Arresting Force** | 1,150 lb

**Min. Setback Distance from edge** | 0" (LE)

**Max. Arresting Distance** | 9'6" (LE)

(NON-LE) ANSI 130-310 lb, 3' | OSHA 100-310 lb, 3' | OSHA 311-420 lb, 3'6"

**Min. Required Fall Clearance** | At or Above

D-Ring (NON-LE) 100-310 lb, 6'6" | 311-420, 7' |

Below D-Ring (LE) 100-310, 18'

**Max. Allowable Free Fall** | 5'

**Materials** | Polyester, nylon, stainless steel

**Lifeline Material** | Galvanized steel cable

**Length** | 8'

## Hook Options



Steel snap hook



Steel rebar hook



Aluminum snap hook



Aluminum rebar hook

## Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by **ANSI Z359.7**

This product is compliant with the following safety regulations and consensus standard:

**OSHA 1910.140 & 1926.502 | ANSI Z359.14-2021**

For more information:

**+1 (800) 466 6385**


**info@guardianfall.com**



Assembled and tested in the **United States**

# CR3-EDGE

Personal Self-Retracting Lifeline



Part number(s)	Description	Hook type	Length	OSHA User Weight Range	ANSI User Weight Range
4200200	CR3 SRL-P, Single, Class 2	Steel snap hook	8 ft	100-420 lb	130-310 lb
4200201	CR3 SRL-P, Single, Class 2	Aluminum snap hook	8 ft	100-420 lb	130-310 lb
4200202	CR3 SRL-P, Single, Class 2	Steel rebar hook	8 ft	100-420 lb	130-310 lb
4200203	CR3 SRL-P, Single, Class 2	Aluminum rebar hook	8 ft	100-420 lb	130-310 lb
4200204	CR3 SRL-P, Single, Class 2	Tie-back hook	8 ft	100-420 lb	130-310 lb
4200205	CR3 SRL-P, Dual, Class 2	Steel snap hook	8 ft	100-420 lb	130-310 lb
4200206	CR3 SRL-P, Dual, Class 2	Aluminum snap hook	8 ft	100-420 lb	130-310 lb
4200207	CR3 SRL-P, Dual, Class 2	Steel rebar hook	8 ft	100-420 lb	130-310 lb
4200208	CR3 SRL-P, Dual, Class 2	Aluminum rebar hook	8 ft	100-420 lb	130-310 lb
4200209	CR3 SRL-P, Dual, Class 2	Tie-back hook	8 ft	100-420 lb	130-310 lb

### Declaration of conformity

This product has been tested in an ISO 17025 accredited laboratory in accordance with all requirements specified by **ANSI Z359.7**

This product is compliant with the following safety regulations and consensus standard:  
**OSHA 1910.140 & 1926.502 | ANSI Z359.14-2021**

For more information:

**+1 (800) 466 6385**

**info@guardianfall.com**



Assembled and  
tested in the  
**United States**