

SERIES 1

FULL-BODY HARNESS

TECHNICAL DATA & SELL SHEET - ISSUE 1

CAPTIVATED CHEST STRAP

Prevents improper adjustment and accidental slippage.

DUAL LANYARD KEEPERS

Safely store unused lanyard leg.

2-BAR TORSO ADJUSTER

Easy adjustment in just seconds.

RUBBER WEB ENDS

Folded over & protects against damage.



IMPACT INDICATORS

Alerts user that a fall has occurred.

VELCRO LABEL COVER

Protects label to maintain legibility.

RUBBER WEB KEEPERS

Retain excess webbing.



Webbing: Polyester

D-Rings: Galvanized Steel

Buckles: Galvanized Steel

Capacity: 130-420 Lbs

MULTIPLE BUCKLE CONFIGURATIONS AVAILABLE

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**

SERIES 1

FULL-BODY HARNESS

TECHNICAL DATA & SELL SHEET - ISSUE 1

Applications



Personal Fall Arrest: A Series 1 Harness may be used in Personal Fall Arrest applications as a component of a Personal Fall Arrest System (PFAS). Structure must withstand loads applied in the directions permitted by the system of at least 5,000 lbs. Maximum free fall is 6', unless used in combination with equipment explicitly certified for extended free fall. Applicable D-ring: Dorsal.



Restraint: A Series 1 Harness may be used in Restraint applications. Restraint systems prevent workers from reaching the leading edge of a fall hazard. Always account for fully deployed length of lanyard/SRL. Structure must withstand loads applied in the directions permitted by the system of at least 1,000 lbs. No free fall is permitted. Restraint systems may only be used on surfaces with slopes up to 4/12 (vertical/horizontal). Applicable D-rings: Dorsal, Chest, Side, & Shoulder.




Work Positioning: A Series 1 Harness, configured with side D-rings, may be used in Work Positioning applications. Work Positioning systems allow a worker to be supported while in suspension and work freely with both hands. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. Maximum allowable free fall is 2'. Applicable D-rings: Side.



Rescue/Confined Space: A Series 1 Harness may be used in Rescue/Confined Space applications. Rescue systems function to safely recover a worker from a confined location or after exposed to a fall. There are various configurations of Rescue systems depending on the type of rescue. Structure must withstand loads applied in the directions permitted by the system of at least 3,000 lbs. No free fall is permitted. Applicable D-rings: Dorsal, Chest, & Shoulder.

Standards

- OSHA 1910
- OSHA 1926 Subpart M
- ANSI Z359.11-2014
- ANSI A10.32-2012 regulations

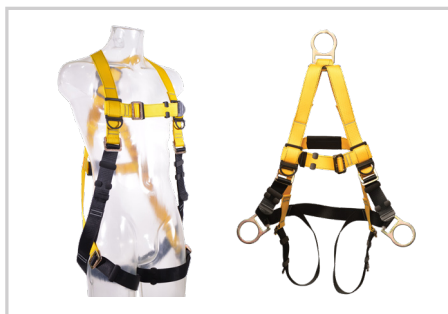

Made from some or all of the following materials: polyester and galvanized steel..

Always follow all manufacturer's instructions for proper adornment and use. Some steps of adorning a harness may require assistance from another person.

Upon completely adorning a harness, Guardian Fall Protection recommends that another person, with knowledge of the safe and correct use of the harness, inspect to ensure the harness is being worn correctly.

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**

SERIES 1

FULL-BODY HARNESS

INDIVIDUAL PRODUCT CODES

BUCKLE TYPES



| Prod. Code | Description | Size | User Weight |
|------------|---|--------|-------------|
| 37000 | Chest & Leg Pass-Through Buckles | XS-S | 130-420 lbs |
| 37001 | Chest & Leg Pass-Through Buckles | M-L | 130-420 lbs |
| 37002 | Chest & Leg Pass-Through Buckles | XL-2XL | 130-420 lbs |
| 37004 | Chest Pass-Through, Leg Tongue Buckles | XS-S | 130-420 lbs |
| 37005 | Chest Pass-Through, Leg Tongue Buckles | M-L | 130-420 lbs |
| 37006 | Chest Pass-Through, Leg Tongue Buckles | XL-2XL | 130-420 lbs |
| 37008 | Chest & Leg Pass-Through Buckles with Side D-rings | XS-S | 130-420 lbs |
| 37009 | Chest & Leg Pass-Through Buckles with Side D-rings | M-L | 130-420 lbs |
| 37010 | Chest & Leg Pass-Through Buckles with Side D-rings | XL-2XL | 130-420 lbs |
| 37012 | Chest Pass-Through, Leg Tongue Buckles with Side D-rings | XS-S | 130-420 lbs |
| 37013 | Chest Pass-Through, Leg Tongue Buckles with Side D-rings | M-L | 130-420 lbs |
| 37014 | Chest Pass-Through, Leg Tongue Buckles with Side D-rings | XL-2XL | 130-420 lbs |
| 37016 | Chest Quick-Connect, Leg Tongue Buckles | XS-S | 130-420 lbs |
| 37017 | Chest Quick-Connect, Leg Tongue Buckles | M-L | 130-420 lbs |
| 37018 | Chest Quick-Connect, Leg Tongue Buckles | XL-2XL | 130-420 lbs |
| 37020 | Chest Quick-Connect, Leg Tongue Buckles with Side D-rings | XS-S | 130-420 lbs |
| 37021 | Chest Quick-Connect, Leg Tongue Buckles with Side D-rings | M-L | 130-420 lbs |
| 37022 | Chest Quick-Connect, Leg Tongue Buckles with Side D-rings | XL-2XL | 130-420 lbs |

Custom configurations available. Not repairable.

Contact customer service
for details.

FOR MORE INFO, PLEASE CALL **1.800.466.6385** OR VISIT **GUARDIANFALL.COM**